



Pressure &

Vacuum Measurement Solutions

WWW.MKSINST.COM

## 631D

### HEATED (150°C OR 200°C) ABSOLUTE BARATRON® CAPACITANCE MANOMETER

The 631D Baratron® capacitance manometer, operating at very high internal temperatures, minimizes the deposition of process byproducts within the sensor—nearly eliminating output drift caused by contamination. Its available operating temperatures are 150°C or 200°C, permitting use in the most demanding vacuum processes in semiconductor manufacturing, such as metal etching and nitride film chemical vapor deposition (CVD). Its new packaging reduces the amount of installation space needed by at least 40%, making it even easier to design into new systems or retrofit into existing equipment.

The 631D is completely self-contained, requiring only input power of  $\pm 15\text{VDC}$  for operation. No separate electronics modules are used, which both reduces the amount of installation space needed and provides better performance due to elimination of noise-generating interconnecting cables. Its Inconel® sensor offers extremely high resistance to corrosion, and its overpressure rating of 45 psia ensures good repeatability and stability regardless of the system operating conditions. The 631D high-performance analog electronics also include fail-safe overtemperature protection and LED status lamps to indicate its operating state. An internally-mounted set of two (2) UL-approved solid-state trip relays for pressure and one (1) UL-approved electromechanical relay for heater failure is also available, allowing the manometer to control external equipment or components. The pressure trip relays may be adjusted by the user independently at atmospheric pressure, eliminating the need for vacuum pumps during set point adjustment.

### Features & Benefits

- Sensor operating temperature of 150°C or 200°C
- All-Inconel capacitance sensor
- High 45 psia overpressure rating
- Compact design
- Optional internally-mounted process relays, solid-state
- Long-term performance in nitride CVD, metal etch, and sterilizing processes
- Reduces installation space, and eliminates noise caused by interconnecting cables
- Insensitive to gas composition
- Performance is unaffected by occasional pressure bursts



# Specifications and Ordering Information

## Full Scale Pressure Ranges

### Accuracy

### Temperature Coefficients

Zero

Span

### Response Time

### Internal Volume

### Input Power

### Output Signal

### Warmup Time

### Operating Temperature Range

### Ambient Airflow Requirements

150°C Models

200°C Models

### Resolution

### Overpressure Limit

### Materials Exposed to Process Gases

### Trip Relay Option

### Fittings

Standard

Optional

### Compliance

1, 2, 10, 30, 100, and 1000 Torr (mm Hg)

0.50% of Reading

0.004% Full Scale/°C (0.008% Full Scale/°C for 1 Torr range) for 150°C products;

0.008% Full Scale/°C (0.016% Full Scale/°C for 1 Torr range) for 200°C products

0.02% Reading/°C

50 msec

6.3 cm<sup>3</sup>

± 15VDC (±5%) @ 1.0 amps max

Analog 0-10VDC into >10 k Ω load

4 hours or less

15 to 50°C

50 ft/min for ambient temperatures of 45 – 50°C

150 ft/min for ambient temperatures of 40 – 50°C

0.01% of Full Scale

45 psia

Inconel® or Incoloy® nickel alloys<sup>1</sup>

Two (2) internally mounted process pressure trip relays, solid state, independently adjustable by customer at atmospheric pressure from 0.5% to 100% of full scale range. Relay capacity of 0.20 amps @ 30 VDC. Comply with UL1577 requirements. Option also includes one (1) UL-approved non-adjustable electromechanical relay for heater failure, rated at 1.0 amps @ 30 VDC.

0.50" (12 mm) OD tube

Swagelok® 8 VCR® female, NW16-KF, 1.5" TriClover, and 2" TriClover

CE<sup>2</sup>

### Ordering Code Example: GGGXUYZTRR Absolute Manometer

Model (GGGG)	Code	Configuration
631D Absolute Manometer	631D	631D
Ranges (XX)		
1	01	11
2	02	
10	11	
30	31	
100	12	
1000	13	
Units of Measurement (U)		
Torr	T	T
Mbar	M	
Pascal	L	
Fittings (Y)		
½" OD tube	A	B
8 VCR female, 1.58" (40.1 mm) port length	B	
8 VCR female, 2.10" (53.3 mm) port length	8	
8 VCR female, 2.50" (63.5 mm) port length	9	
NW16-KF <sup>3</sup>	D	
1.5" TriClover	M	
2.0" TriClover	N	
Accuracy (Z)		
0.50% Reading	F	F
Temperature (T)		
150°C	H	H
200°C	P	
Integral Relays (RR)		
No relays	None	AA
Trip Point A Above Set Point, Trip Point B Above Set Point <sup>4</sup>	AA	
Trip Point A Above Set Point, Trip Point B Below Set Point <sup>4</sup>	AB	
Trip Point A Below Set Point, Trip Point B Below Set Point <sup>4</sup>	BB	
Trip Point A Below Set Point, Trip Point B Above Set Point <sup>4</sup>	BA	

1. Products with TriClover fittings have 316L stainless steel fittings.

2. For CE compliance, the mating electrical connector must be properly grounded.

3. Contact MKS Applications Engineering for sealing material recommendations.

4. Unless otherwise specified, both relays will be set to activate at 50% of Full Scale.

### MKS Instruments, Inc. Global Headquarters

2 Tech Drive, Suite 201  
Andover, MA 01810

Tel: 978.645.5500

Tel: 800.227.8766 (in U.S.A.)


Web: www.mksinst.com

### MKS Instruments, Inc.

### Pressure & Vacuum Measurement Solutions

Six Shattuck Road  
Andover, MA 01810

Tel: 978.975.2350

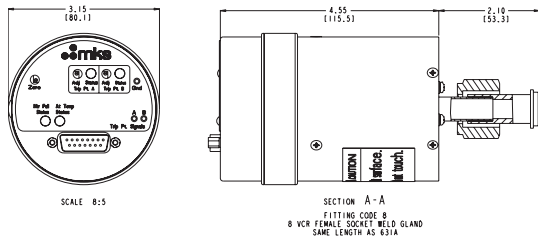

### Dimensional Drawing —

Note: Unless otherwise specified, dimensions are nominal values in inches (mm referenced).

For dimensions on other configurations, please contact MKS Applications Engineering.



631D - 3/19

© 2014-2019 MKS Instruments, Inc.  
All rights reserved.

Some Baratron® capacitance manometer products may not be exported to many end user countries without both US and local government export licenses under ECCN 2B230. Specifications are subject to change without notice. mksinst™ is a trademark and Baratron® is a registered trademark of MKS Instruments, Inc., Andover, MA. Swagelok® and VCR® are registered trademarks of Swagelok Co., Solon, OH. Inconel® and Incoloy® are registered trademarks of Inco Alloys International, Inc., Huntington, WV. UL® is a registered trademark of Underwriters Laboratories, Inc., Northbrook, IL.