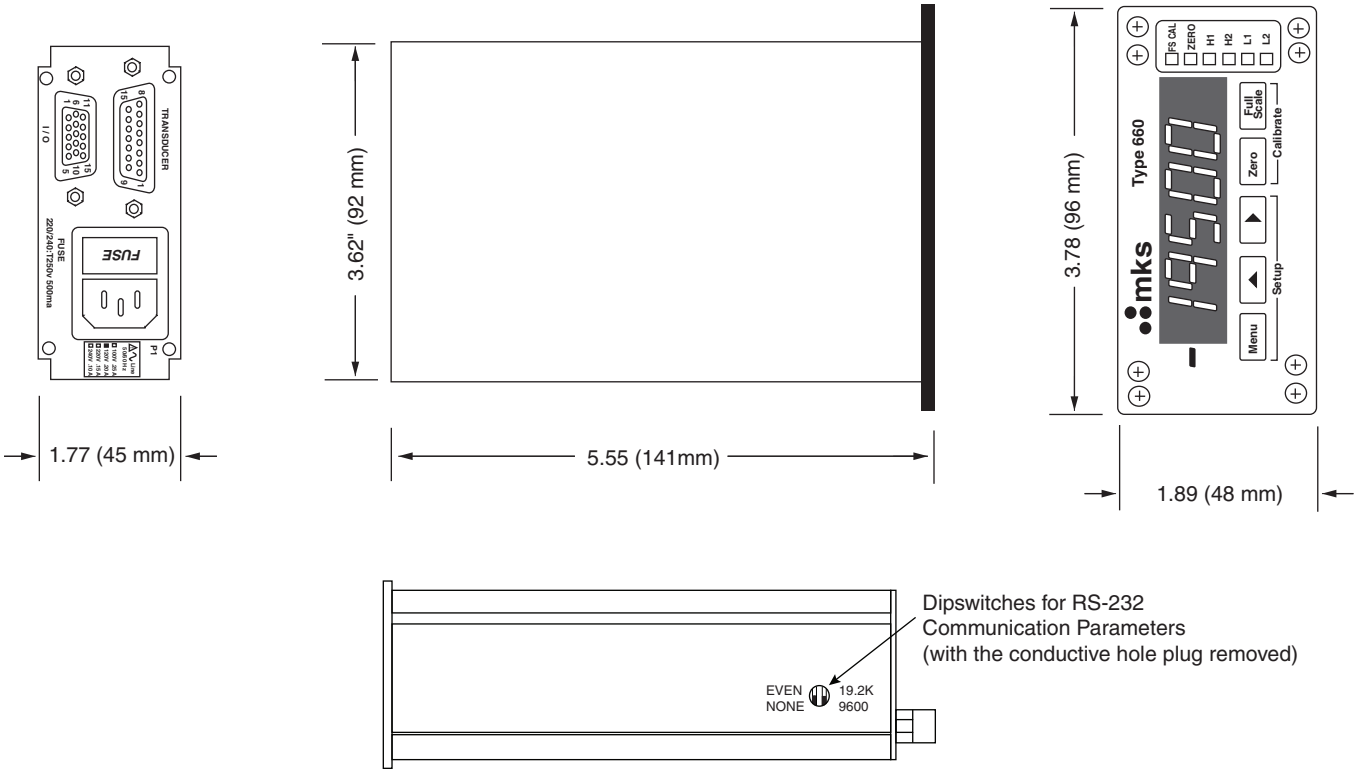

TRANSDUCER
I / O
FUSE
FUSE
220/240:T250v 500ma
P1
1.77 (45 mm)
3.62" (92 mm)
5.55 (141mm)
3.78 (96 mm)
1.89 (48 mm)
mks
Type 660
FS CAL
ZERO
H1
H2
L1
L2
Full Scale
Zero
Calibrate
Menu
Setup
Dipswitches for RS-232
Communication Parameters
(with the conductive hole plug removed)
EVEN
NONE
19.2K
9600