

# GM51A

## Metal Sealed, Digital Mass Flow Controller



The GM51A is a 1.125" (28.6 mm) wide metal sealed MFC well suited for a wide variety of applications requiring flow control capability from 5 sccm to 50 slm Full Scale, N<sub>2</sub> equivalent. The GM51A incorporates the latest in digital flow control electronics along with a well proven, patented thermal sensor and mechanical design.

The GM51A digitally controlled MFC is available with either analog or digital I/O. The digital control electronics utilize the latest in MKS control algorithms providing fast and repeatable response to set point throughout the device control range. Typical response times are on the order of 500 milliseconds. Included is a digital calibration that yields 1% of set point accuracy on the calibration gas. All GM51As include Modbus as an available secondary I/O (excludes PROFINET® and EtherCAT®).

The GM51A with 4 VCR fittings is designed with a 1.125" (28.6 mm) width and standard 4.88" (124 mm overall) length allowing it to fit in standard gas systems. It is also available with the 1.125" (28.6 mm) IGS compatible C-seal and W-seal configurations. The GM51A utilizes the standard 3-inch footprint most often used by MFCs in the 5 sccm to 50 slm flow rate range enabling its use without the need to modify existing gas line configurations. The GM51A metal sealed MFC with its electropolished surface finish is well suited for use in high purity process applications. The GM51A is available with a normally closed valve and in an MFM version (not electropolished).

### Product Features

- Embedded user interface provides the ability to
  - Easily change device range and user gas reducing inventory requirements
  - Monitor device functionality and collect performance data in-situ
- 10μ inch electropolished 316L surface finish enables MFC use for high purity applications
- Wide choice of digital (EtherCAT, DeviceNet™, PROFINET and RS485) or analog (0 to 5 VDC) I/O



### Key Benefits

- Patented thermal sensor design provides exceptional zero stability
- Percent of set point accuracy (calibration gas) enables precise process control

## Specifications

### Performance

Full Scale Flow Ranges (N <sub>2</sub> equivalent)		5 - 50000 sccm
Maximum Inlet Pressure	MFC MFM	<ul style="list-style-type: none"> <li>• 150 psig (can not exceed pressure differential requirement across MFC)</li> <li>• 500 psi</li> </ul>
Normal Operating Pressure Differential (N <sub>2</sub> Full Scale) (with atmospheric pressure at the MFC outlet)		<ul style="list-style-type: none"> <li>• 5 to 5000 sccm; 10 to 40 psid</li> <li>• 10000 to 20000 sccm; 15 to 40 psid</li> <li>• 30000 to 50000 sccm; 25 to 40 psid</li> </ul>
Proof Pressure		1000 psig
Burst Pressure		1500 psig
Control Range		2% to 100% of Full Scale (range on mech.)
Typical Accuracy (with N <sub>2</sub> calibration gas)		<ul style="list-style-type: none"> <li>• ±1% of Reading for 20 to 100% Full Scale</li> <li>• ±0.2% of Full Scale for 2 to 20% Full Scale</li> <li>• ±1% of Reading for meters</li> </ul>
Repeatability		±0.3% of Reading
Resolution		0.1% of Full Scale
Temperature Coefficients	Zero Span	<ul style="list-style-type: none"> <li>• &lt;0.05% of Full Scale/°C</li> <li>• &lt;0.08% of Reading/°C</li> </ul>
Inlet Pressure Coefficient		<0.02% of Reading/psi
Warm-up Time (to within 0.2% of Full Scale of steady state performance)		30 minutes
Typical Controller Settling Time (per SEMI Guideline E-17-0600)		<750 msec., typical above 5% Full Scale
Operating Temperature Range (Ambient)		10°C to 50°C
Storage Humidity		0 to 95% relative humidity, non-condensing
Storage Temperature		-20° to 80°C (-4° to 176° F)


### Mechanical

Fittings (compatible with)		<ul style="list-style-type: none"> <li>• Swagelok® 4 VCR® male</li> <li>• C-seal surface mount</li> <li>• W-seal surface mount</li> </ul>
Leak Integrity	External (scc/sec He) Through Closed Valve	<ul style="list-style-type: none"> <li>• &lt;1 x 10<sup>-10</sup></li> <li>• &lt;1.0% of Full Scale at 40 psig inlet to atmosphere (To assure no flow-through, a separate positive shut-off valve is required.)</li> </ul>
Wetted Materials	Standard Valve Seat (MFC only)	<ul style="list-style-type: none"> <li>• 316L S.S. VAR (equivalent to 316 S.S. SCQ for semiconductor quality), 316 S.S., Elgiloy®, Nickel, KM45</li> <li>• Teflon®</li> </ul>
Surface Finish	MFC MFM	<ul style="list-style-type: none"> <li>• 10µ inch average Ra (electropolished)</li> <li>• 16µ inch average Ra</li> </ul>
Weight		<3 lbs (1.4kg)

### Electrical Analog I/O

Input Power Required		+15 to +24 VDC @ (<4 watts)
Flow Input/Output Signal	Voltage (0 to 5 VDC)	• 15 pin Type "D" male, 9 pin Type "D" male
Compliance		CE

Digital I/O	DeviceNet™	RS485	EtherCAT®	PROFINET®
<b>Input Power Required</b>	+11 to +25 VDC per (< 4 watts)	+15 to +24 VDC (< 4 watts)	+24 VDC (< 5 watts)	+24 VDC (< 5 watts)
<b>Connector</b>	5 pin micro connector (power and comm.)	9 pin Type D male (power and comm.)	2 x RJ-45 (comm.) male, M8 male, 5 pin (power)	2 x RJ-45 (comm.) male, M8 male, 5 pin (power)
<b>Data Rate Switch/Selection</b>	4 positions: 125, 250, 500K (Default), (programmable over network)	No switch Set data rate via RS485	No switch	No switch
<b>Comm. Rate(s)</b>	125 Kbps; 250 Kbps; 500 Kbps	9.6 Kbps; 19.2 Kbps 38.4 Kbps	100 Mbps	100 Mbps
<b>MAC ID Switches/Addresses</b>	2 switches, 10 positions; 0,0 to 6,3 1 to 254	Set address over RS485 Station Addresses 0,0 to 9,9	3 switches, 16 positions	N/A
<b>Network Size</b>	Up to 64 nodes	Up to 32 nodes	Up to 4095 nodes	N/A
<b>Visual Indicators</b>	LED Network (green/red) LED Module (green/red)	LED Comm (yellow) LED Error (red)	LED Power (green) LED Run (green) LED Error (red) LED Comm (green)	LED Maint (amber) LED BUS Fault (red) LED Ready (green) LED Sys Fault (red)
<b>Compliance</b>	CE	CE	CE	CE

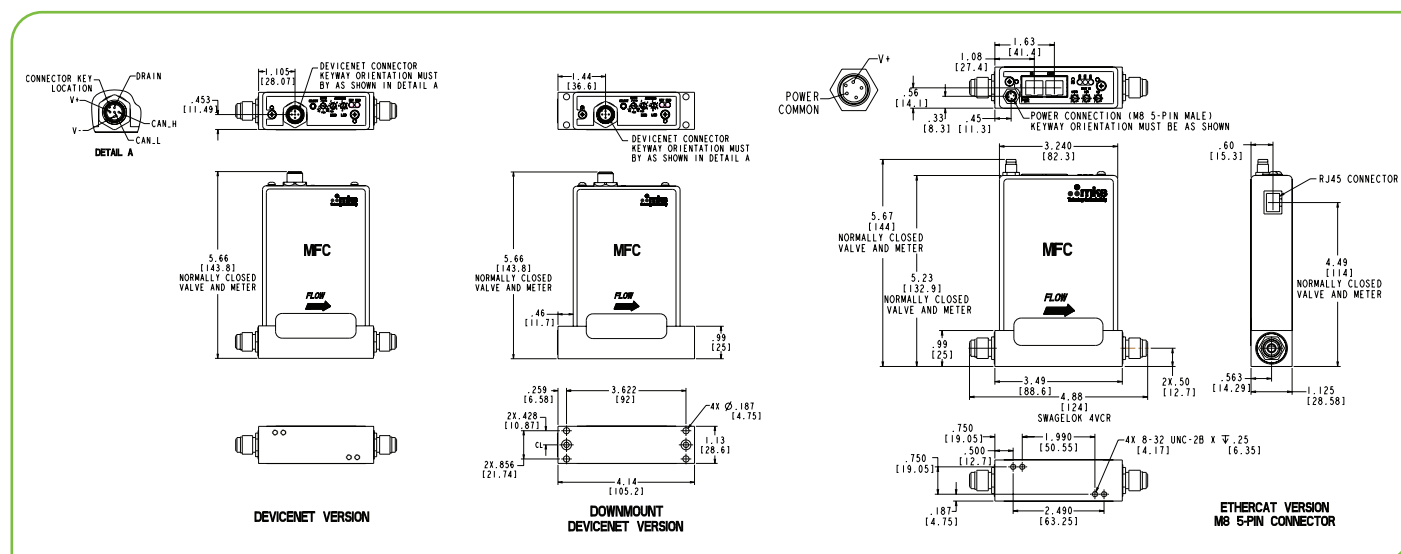

Dimensional Drawings: DeviceNet™, Downmount with VCR® fittings\* and EtherCAT® with VCR fittings\*

Note: Unless otherwise specified, dimensions are nominal values in inches (mm referenced). \*(See manual for additional I/O and fitting types)

## Ordering Information

Ordering Code Example: GM51A013502R8M0020	Code	Configuration
<b>Model</b>		
MFC Mass Flow Controller GM51A	GM51A	GM51A
<b>Gas (per Semi Standard E52-0703)</b>		
013 = Nitrogen = N <sub>2</sub> 029 = Ammonia = NH <sub>3</sub> 110 = Sulfur Hexafluoride = SF <sub>6</sub>	013 029 110	013
<b>Flow Range Full Scale*</b>		
5 sccm 10 sccm 20 sccm 50 sccm 100 sccm 200 sccm 500 sccm 1000 sccm 2000 sccm 5000 sccm 10000 sccm 20000 sccm 30000 sccm 50000 sccm	500 101 201 501 102 202 502 103 203 503 104 204 304 504	502
<b>Fittings (compatible with)</b>		
Swagelok 4 VCR male C-seal surface mount W-seal surface mount	R C H	R
<b>Connector</b>		
EtherCAT DeviceNet RS485 (uses 9 pin connector) PROFINET Analog 0 to 5 VDC (9 pin D connector) Analog 0 to 5 VDC (9 Pin D connector), Tied Grounds Analog 0 to 5 VDC (15 pin D connector) Analog 0 to 5 VDC (15 pin D connector), Tied Grounds	8 6 5 9 A L B M	8
<b>Valve/Device Type</b>		
Normally Closed/Mass Flow Controller, Teflon® No Valve/Mass Flow Meter	M0 30	M0
<b>Reserved</b>		
Reserved for MKS Future Use Standard	0	0
<b>Firmware</b>		
Unless otherwise specified, MKS will ship firmware revision current to date.	20	20

\* The Full Scale flow rate is designated by a 3 digit number. The first two digits represent the significant digits of the Full Scale flow rate separated by a decimal point. The third digit is the exponent of the power of ten. Example flow rate code:  
254 is  $2.5 \times 10^4$  or 25000 sccm                      153 is  $1.5 \times 10^3$  or 1500 sccm                      601 is  $6.0 \times 10^1$  or 60 sccm

\*\* The user should consult with their gas supplier on the appropriate elastomer which is compatible with the selected gas.