



D28F

HEATED (100°C) DUAL-RANGE ABSOLUTE BARATRON® CAPACITANCE MANOMETER

The D28F dual-range manometer, an application-specific absolute Baratron® capacitance manometer, is the latest addition to the MKS family of general purpose manometers. With two distinct measurement outputs, the D28F provides accurate, reliable, and repeatable pressure measurements for multi-step processes. The D28F is heated to 100°C and is available in Full Scale ranges of 1, 10, 100 and 1000 Torr, with a customer specified second output having either a 2, 5, or 10 times lower Full Scale pressure output to provide a proportionally higher sensitivity. The lower pressure limitation of system A/D resolution is now minimized with higher output signal levels. The D28F requires ±15 VDC (±5%) input at 500 mA (max.), and provides two outputs of 0 to 10 VDC linear with pressure.

Based on the well-established Baratron capacitance manometer technology, the sensor's wetted surfaces are made of Inconel® for corrosion resistance and process compatibility. Measurements are independent of gas composition. The modern stainless steel enclosure provides a cleanroom-compatible product.

Features & Benefits

Accurate

- Second output provides greater resolution over the lower range of the instrument
- Percent of Reading accuracy for more repeatable output signal
- Provides improved sensitivity for system I/O architecture with limited A/D resolution
- Measures total pressure directly, independent of gas composition

Robust

- All Inconel corrosion resistant wetted surfaces

- Integrated sump (US Patent #5,822,685) provides particle protection
- High overpressure rating for improved reliability

Compatible

- Cleanroom-compatible stainless steel package
- Compatible with earlier Baratron capacitance manometers, MKS power supply/readout modules, and pressure controllers





Specifications and Ordering Information

Full Scale Ranges	1, 10, 100, 1000 Torr
Resolution	0.001% of Full Scale
Accuracy	0.25% of Reading (including non-linearity, hysteresis, and non-repeatability)
Temperature Coefficients	
Zero	0.002% of Full Scale/°C
Span	0.02% of Reading/°C
Ambient Operating Temperature	15°C to 40°C
Volume	6.3 cc
Warm-Up Time	2 hours
Overpressure Limit	45 psia (310 kPa)
Materials Exposed to Gases	Inconel® (Optional fittings: 316 SS)
Input Power Required	±15 VDC ±5% @ 0.5 Amps (max.)
Output Signal	Pressure: 0 to +10 VDC into > 10K Ω load; second output 0 to 10 VDC into > 10K Ω load over lower range
Fittings	Standard: 1/2" (12.7 mm) tubulation; Optional: 8 VCR® female, Mini-CF, NW 16 KF, NW25 KF
Compliance	CE

Ordering Code Example: D28F01TBAE1B2

Model	Code	Configuration
D28F	D28F	D28F
Ranges mmHg (Torr)		
1	01T	01T
10	11T	
100	12T	
1000	13T	
Fittings		
1/2" Tube	BA	BA
8 VCR	CE	
Mini-CF	HA	
NW 16 KF	GA	
NW 25 KF	GC	
Accuracy (% of Reading)		
0.25% (standard 1 thru 1000 Torr only)	E	E
Orientation/Calibration		
Specific Orientation for Calibration not required (1 Torr and above, first output)	0	1
Vertical Calibration (required below 1 Torr, first output)	1	
Horizontal Calibration (required below 1 Torr, first output)	5	
Connector		
15 pin Type "D" with Thread Locks	B	B
15 pin Type "D" with Slide Locks	P	
Second Range Gain Ratio		
2 to 1	2	2
5 to 1	5	
10 to 1	0	

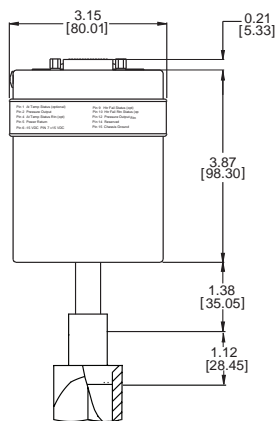

Dimensional Drawing —

Note: Unless otherwise specified, dimensions are nominal values in inches (mm referenced).



MKS Instruments, Inc. Global Headquarters

2 Tech Drive, Suite 201
Andover, MA 01810
Tel: 978.645.5500
Tel: 800.227.8766 (in U.S.A.)
Web: www.mksinst.com

MKS Instruments, Inc. Pressure & Vacuum Measurement Solutions

Six Shattuck Road
Andover, MA 01810
Tel: 978.975.2350

D28F - 3/19
© 2014-2019 MKS Instruments, Inc.
All rights reserved.

Some Baratron® capacitance manometer products may not be exported to many end user countries without both US and local government export licenses under ECCN 2B230.

Specifications are subject to change without notice. mksinst™ is a trademark and Baratron® is a registered trademark of MKS Instruments, Inc., Andover, MA. VCR® is a registered trademark of Swagelok® Co., Solon OH. Inconel® is a registered trademark of Inco Alloys International, Inc., Huntington, WV.